




TK01

RGB+CCT

## RGB + Color Temperature

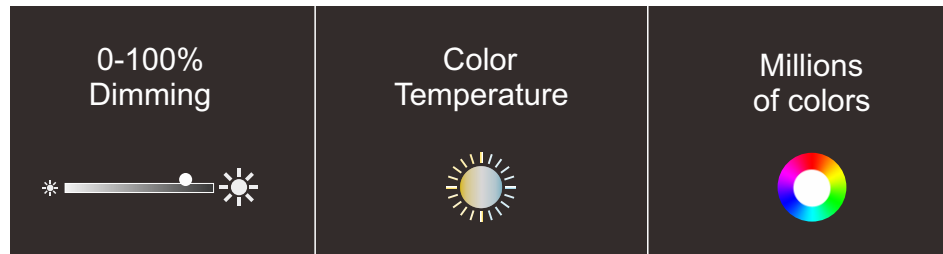


**6<sub>w</sub>**

**Auto-transmitting  
Auto-synchronization**

50000h Lifespan

**2.4G RF**

Group Control with many zones,  
and endless LED bulbs in each zone

**540 LUMENS**

### Feature

- Compatible with Skydance's 2.4G RGB+Color Temperature remote.
- Match with WiFi-relay device for smart phone control.
- 16 million colors and 10 mode, adjustable color temperature and saturation.
- 0-100% Brightness, auto-transmitting and auto-synchronization function.
- Use SAMSUNG LED.
- 50,000 hours lifespan.


### Technical parameter

Model	TK01	LEDQTY	SAMSUNG10pcsWW28350.5W
Power	6W		SAMSUNG10pcs CW28350.5W
Voltage	AC86V-265V50-60Hz		SAMSUNG4pcs RGB50501.5W
ColorT emperature	2700-6500K	Lifespan(h)	50000h
Ra/CRI	>80	BeamAngle	120°
PF(cos)	>0.5	Material	Aluminum+ PCcover
LuminousEfficiency	90LM/W	Base	E27/E26/B22
LuminousFlux(lm)	540LM	Dimensions	Ø57*H100mm

### Safety guide

To reduce the risk of electric shock, Please ensure the power is not connected when you install the bulb. Even though the light body is cold to touch shortly after normal operation, please be careful when handling the metal cooling fins as they may contain sharp edges. Always hold the light by the acrylic part. If the light is damaged, please seek professional electrical assistance, or please discard the light.

## Dimension



## Controlled by smart phone APP



## Controlled by wireless 2.4GHz remote control

Handhold remote



Wall mounted remote



Enter android market / App Store, Search SkySmart application software, download and install.

## Dynamic mode list

No.	Name	No.	Name
1	RGB jump	6	RGB fade in and out
2	RGB smooth	7	Red fade in and out
3	6 color jump	8	Green fade in and out
4	6 color smooth	9	Blue fade in and out
5	Color temperature smooth	10	White fade in and out

## Troubleshooting

- The bulb does not respond to the RF remote.
  - Check if the power is switched on at the wall.
  - Check if the battery levels of the RF remote are normal, or replace battery.
- The bulb changes unexpectedly by itself.
 

Possible reason: The bulb may be controlled by another RF remote.

Solution: You can delete match firstly, then match again.

### Match method :

Switch off the power, then switch on power again, immediately short press on/off key (single zone remote) or zone key(multiple zone remote) 3 times on the remote. The light blinks 3 times means match is successful.

### Delete match :

Switch off the power, then switch on power again, immediately short press on/off key (single zone remote) or zone key(multiple zone remote) 5 times on the remote. The light blinks 5 times means delete all matched remote.