

S1-HL

RF Dimming High Voltage LED Strip Controller

RF DIM



CE RoHS



Features

- RF dimming High voltage LED strip controller, can control maximum about 50 meters of high voltage LED strip, different LED strip may have difference.
- Match with RF 2.4G single zone or multiple zone single color remote control.
- One RF controller accept up to 10 remote control.
- 4096 levels 0-100% dimming smoothly without any flash.
- Light on/off fade time 3s selectable.
- Connect with external push switch to achieve on/off and 0-100% dimming function.

Technical Parameters

Input and Output		Dimming data		Safety and EMC	
Input voltage	100-240VAC	Input signal	RF 2.4GHz + Push	EMC standard	EN IEC 55015/ EN IEC 61547
Input current	2.7A	Remote distance	30m[Barrier-free space]		EN IEC 61000-3-2/ EN IEC 61000-3-3
Output voltage	100-240VDC	Dimming gray scale	4096 (2^12) levels		ETSI EN 301 489-1/-3
Output current	Max. 2.5A	Dimming range	0 - 100%	Safety standard	EN 61347-1/-2
Output power	250-600W	PWM Frequency	2KHz	Radio equipment	ETSI EN 300 440
Environment				Certication	CE RoHS
Operation temperature	Ta: -25℃ ~ +45℃	Package		Warranty	
Case temperature (Max.)	Tc: +88℃	Size	L178 x W50 x H38mm	Warranty	5 years
IP rating	IP20	Gross weight	0.146kg		

Mechanical Structures and Installations

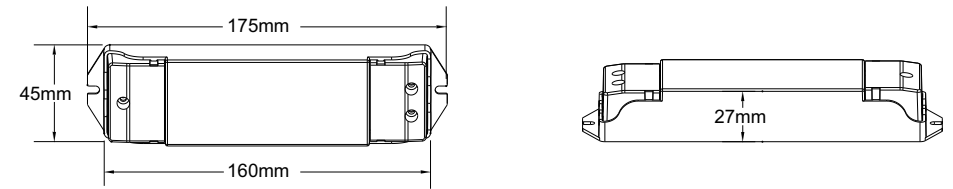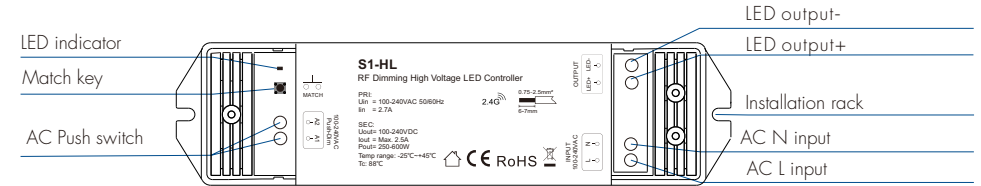


Wiring Diagram



Caution:

This controller apply for high voltage LED strip, please carefully ensure all wire connections and polarities are correct and secure before applying power, otherwise this controller or high voltage LED strip will be damaged.

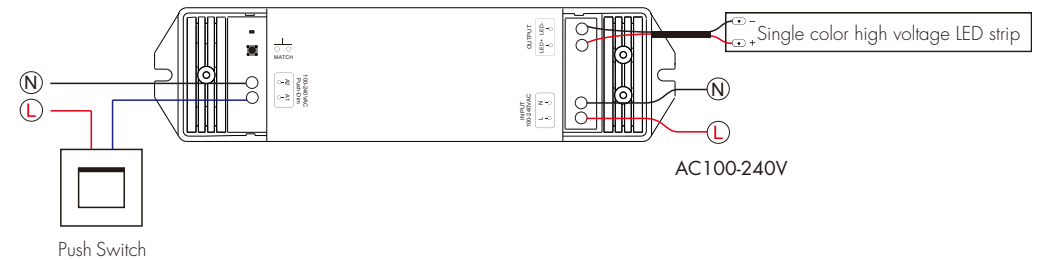

Note:

It is recommended that it be used at 80% of full load in order to cope with emergencies and harsh environments.

AC Push Dim Function

- **Short press:** Turn on or off light.
- **Long press(1-6s):** Press and hold to stepless dimming. With every other long press, the light level goes to the opposite direction.
- **Dimming memory:** Light returns to the previous dimming level when switched off and on again, even at power failure.

Match RF Remote Control

User can choose the suitable match/delete ways. Two options are offered for selection:

Use Match key

Match:

Short press match key,
immediately press on/off key (single zone remote)
or zone key (multiple zone remote) on the remote.
The LED indicator fast flash a few times means match
is successful.

Delete:

Press and hold match key for 5s,
The LED indicator fast flash a few times
means all matched remotes were deleted.

Use Power Restart

Match:

Switch off the power, then switch on power, repeat again.
Immediately short press on/off key (single zone remote)
or zone key (multiple zone remote) 3 times on the remote.
The light blinks 3 times means match is successful.

Delete:

Switch off the power, then switch on power, repeat again.
Immediately short press on/off key (single zone remote)
or zone key (multiple zone remote) 5 times on the remote.
The light blinks 5 times means all matched remotes were deleted.

Fade in and Fade out Setting

Long press match key 15s, set the fade in and fade out time to 3s, the indicator light of LED controller blinks 3 times.
Long press match key 10s, restore factory default parameter, the indicator light of LED controller blinks 2 times,
the light on/off time restores to 0.5s.

Tc Point Location

