


ZigBee 2 Colors 2 Wires LED Strip Controller

- Only apply to 2-wires WW+CW LED strip.
- Tuya smart APP cloud control, support on/off, color temperature and brightness adjust, delay turn on/off light, timer run, scene and music play function.
- Philips HUE APP control by connect with Philips HUE bridge.
- Voice control, support for Amazon Alexa, Google Assistant, Tmall Genie and Xiaodu voice assistant.
- Match with RF 2.4G remote control optional.
- Each V2-S(WZ) controller can also work as Zigbee-RF converter, then use Tuya smart APP to control one or more RF CCT LED controller synchronously.
- Connect with external push switch to achieve on/off and 0-100% dimming function.
- Switch 3 levels color temperature(WWV, NW, CW) in consecutive power-on sequence.
- Fade in and out effect selectable.

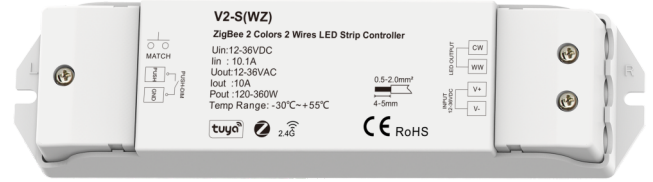


CE RoHS RED


Technical Parameters

Input and Output		Dimming data		Safety and EMC	
Input voltage	12-36VDC	Input signal	Zigbee + RF + Push Dim	EMC standard (EMC)	ETSI EN 301 489-1 V2.2.3 ETSI EN 301 489-17 V3.2.4
Input current	10.1A	Control distance	30m(Barrier-free space)	Safety standard	EN 61348-1:2015+A1:2021 EN 61348-2-13:2014+A1:2017
Output voltage	12-36VAC	Dimming gray scale	256 levels	Radio Equipment(RED)	ETSI EN 300 328 V2.2.2
Output current	10A	Dimming range	0-100%	Certification	CE,EMC,RED
Output power	120-360W	Dimming curve	Linear	Package	
Output type	Constant voltage	PWM Frequency	2000Hz	Size	L178 x W50 x H38mm
Warranty and Protection		Environment		Gross weight	0.136kg
Warranty	5 years	Operation temperature	Ta: -30°C ~ +55°C		
Protection	Reverse Polarity	Case temperature (Max.)	Tc: +85°C		


Mechanical Structures and Installations

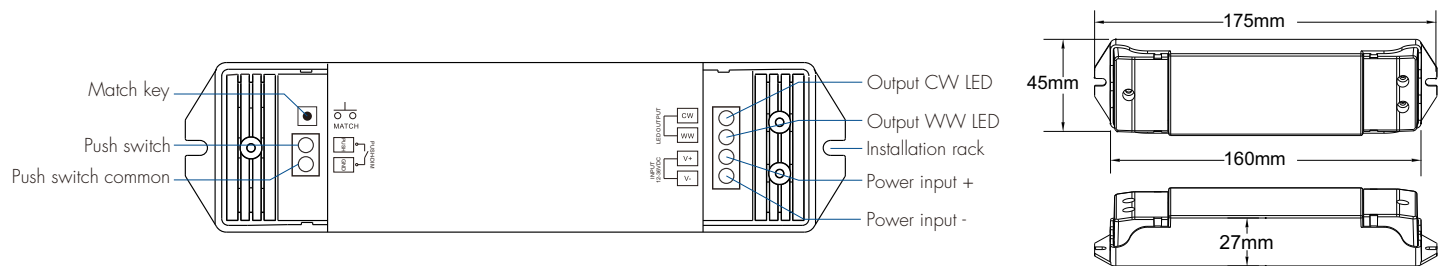

System wiring

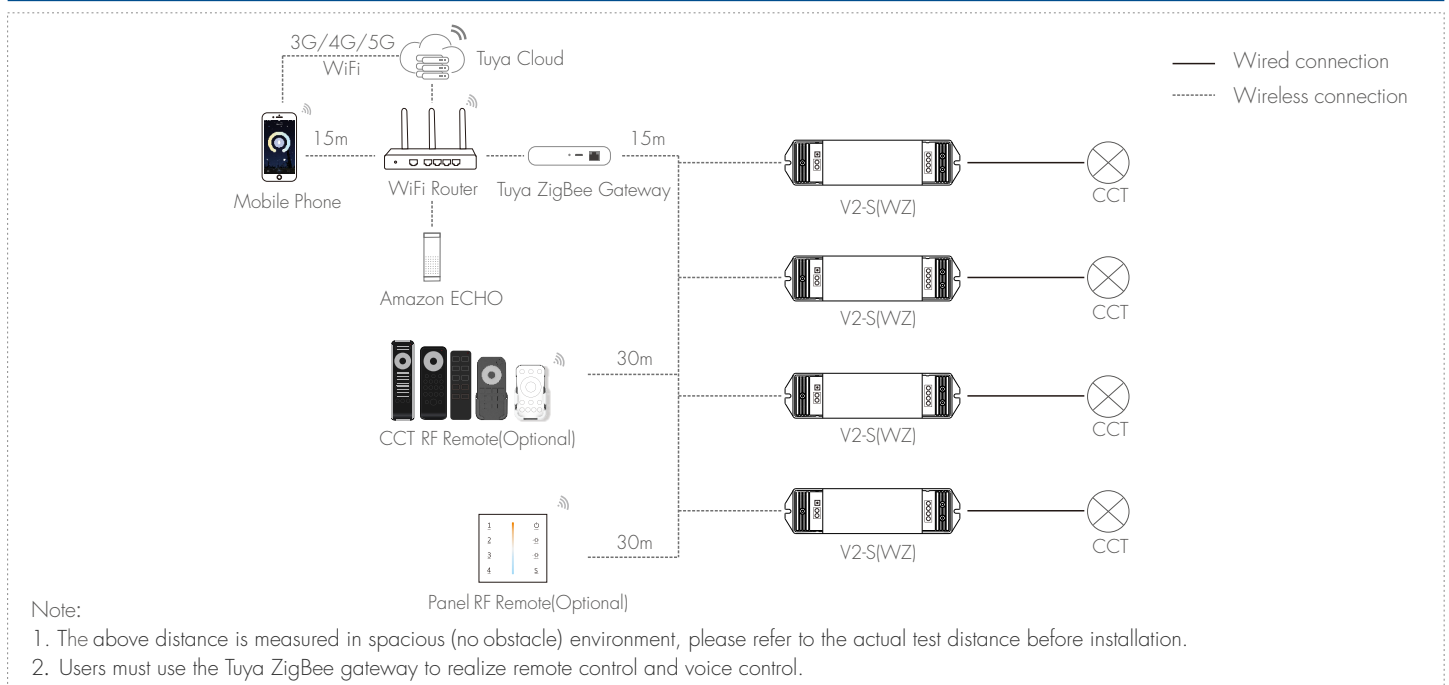

Wiring Diagram

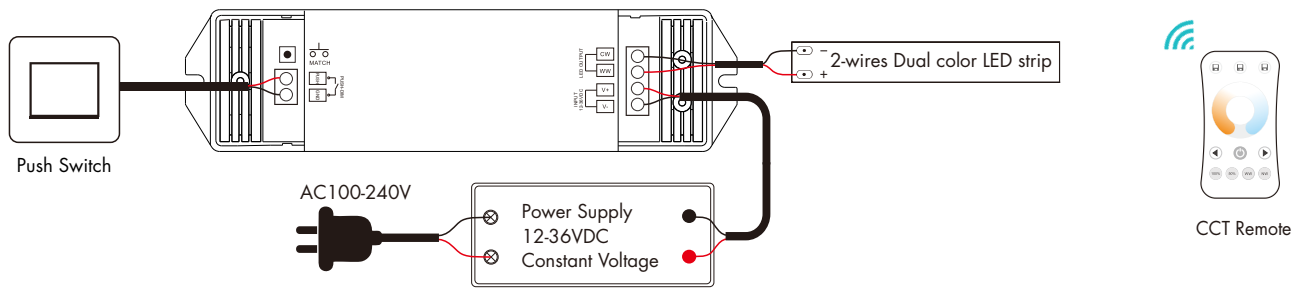

Note: 1. Switch off the power, then switch on power, repeat again.

Immediately short press match key 3 times, the light on/off time will change between 3s and 0.5s.

2. Continuous power off and on operation will change 3 levels color temperature (WW, NW and CW) in sequence.

Push Dim

Click	ON/OFF
Double Click	Turn on at 100% or 10%(night light) and vice-versa
Long press(>1s) from OFF	Color temperature UP/DOWN (turn off and turn on to return dimming)
Long press(>1s) from ON	Dimming UP/DOWN

Tuya Smart APP network connection


Press and hold Match/Set key for 5s, or push twice Match/Set key fastly:

Clear previous network connection, enter config mode, the blue LED indicator fast flash, the output LED will flash 10 times.

Repeat power on and off for 5 consecutive times, also clear previous network connection, enter config mode, the output LED will flash 10 times.

If Tuya smart APP network connection succeed, the blue LED indicator will stop flash, and in Tuya smart APP, you can find the ZB-CCT device.

Tuya Smart APP interface

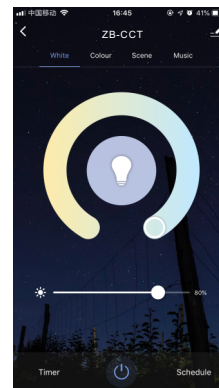

Touch color wheel to adjust color temperature.
Touch brightness slide to adjust brightness.

V2-S(WZ) match remote control (Optional)

End user can choose the suitable match/delete ways. Two options are offered for selection:

Use the V2-S(WZ)'s Match key

Match:

Short press match key of V2-S(WZ), immediately press on/off key (single zone remote) or zone key (multiple zone remote) on the remote. The LED indicator fast flash a few times means match is successful.

Delete:

Press and hold match key of V2-S(WZ) for 10s to delete all match, The LED indicator fast flash a few times means all matched remotes were deleted.

Use Power Restart

Match:

Switch off the power of V2-S(WZ), then switch on power, repeat again. Immediately short press on/off key (single zone remote) or zone key (multiple zone remote) 3 times on the remote. The light blinks 3 times means match is successful.

Delete:

Switch off the power of V2-S(WZ), then switch on power, repeat again. Immediately short press on/off key (single zone remote) or zone key (multiple zone remote) 5 times on the remote. The light blinks 5 times means all matched remotes were deleted.

V2-S(WZ) work as Zigbee-RF converter to match RF CCT LED controller

End user can choose the suitable match/delete ways. Two options are offered for selection:

Use the controller's Match key

Match:

Short press match key of the controller, immediately press on/off key on the Tuya smart APP. The LED indicator fast flash a few times means match is successful.

Delete:

Press and hold match key of the controller for 5s, The LED indicator fast flash a few times means match was deleted.

Use Power Restart

Match:

Switch off the power of the controller, then switch on power, repeat again. Immediately short press on/off key 3 times on the Tuya smart APP. The light blinks 3 times means match is successful.

Delete:

Switch off the power of the controller, then switch on power, repeat again. Immediately short press on/off key 5 times on the Tuya smart APP. The light blinks 5 times means match was deleted.