


1 Channel Constant Voltage Power Repeater

- 5-36V constant voltage power repeater.
- one channel, 8A.
- To receive PWM signal control.
- Power repeater in series or in parallel to expand output unlimitedly.
- Apply to single color constant voltage LED strip or module.

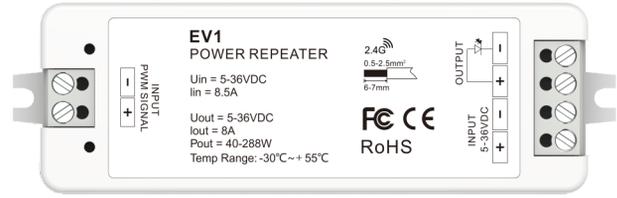


CE RoHS emc LVD

Technical Parameters


Input and Output		Environment		Safety and EMC	
Input voltage	5-36VDC	Operation temperature	Ta: -30°C ~ +55°C		EN IEC 55015:2019+A11:2020 EN 61547:2009
Input current	8.5A	Case temperature(Max.)	Tc: +85°C	EMC standard (EMC)	EN IEC 61000-3-2:2019+A11:2021 EN 61000-3-3:2013+A11:2019
Input signal	PWM	IP rating	IP20	Safety standard(LVD)	EN 61347-1:2015+A1:2021 EN 61347-2-13:2014+A1:2017
Output voltage	5-36VDC			Certification	CE,EMC,LVD
Output current	8A	Package		Warranty and Protection	
Output power	40-288W	Size	L114 x W38 x H26mm	Warranty	5 years
Output type	Constant voltage	Gross weight	0.053kg	Protection	Reverse polarity, Short circuit

Mechanical Structures and Installations

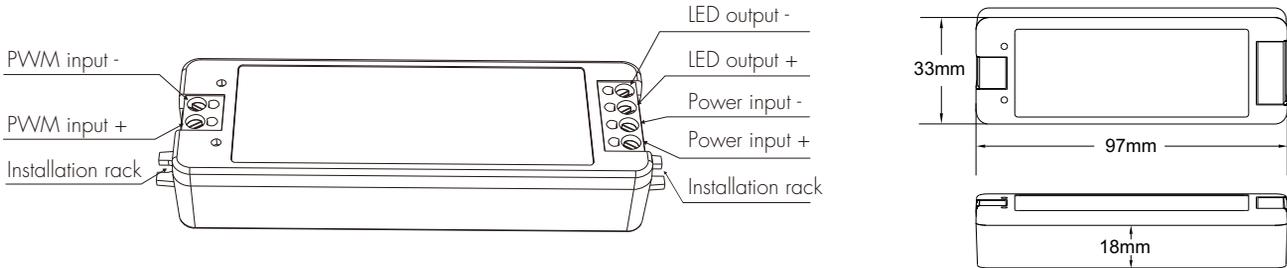


Wiring Diagram

- Parallel connection

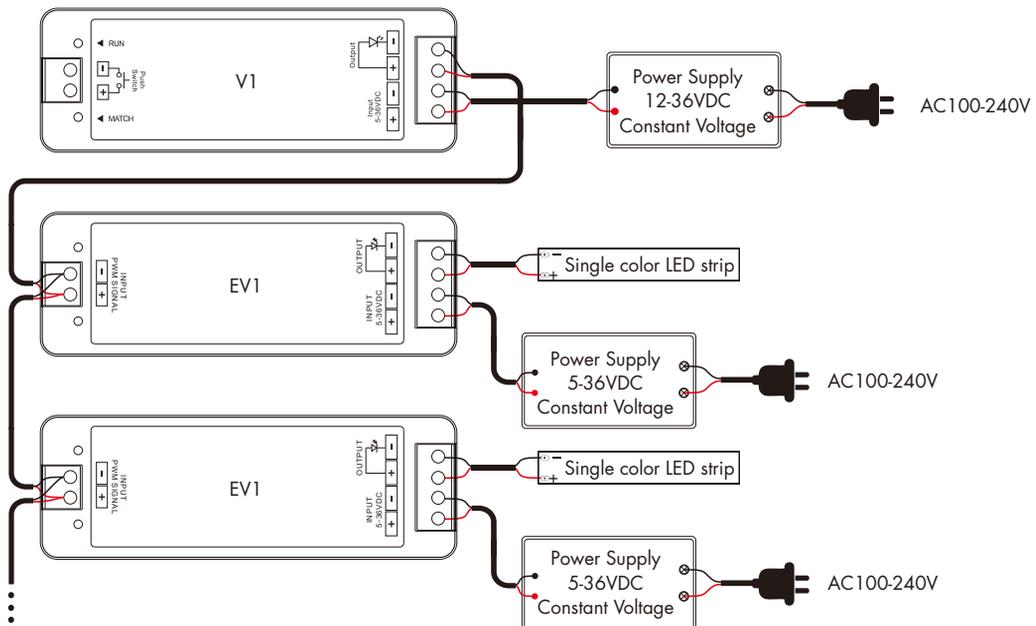

• Series connection

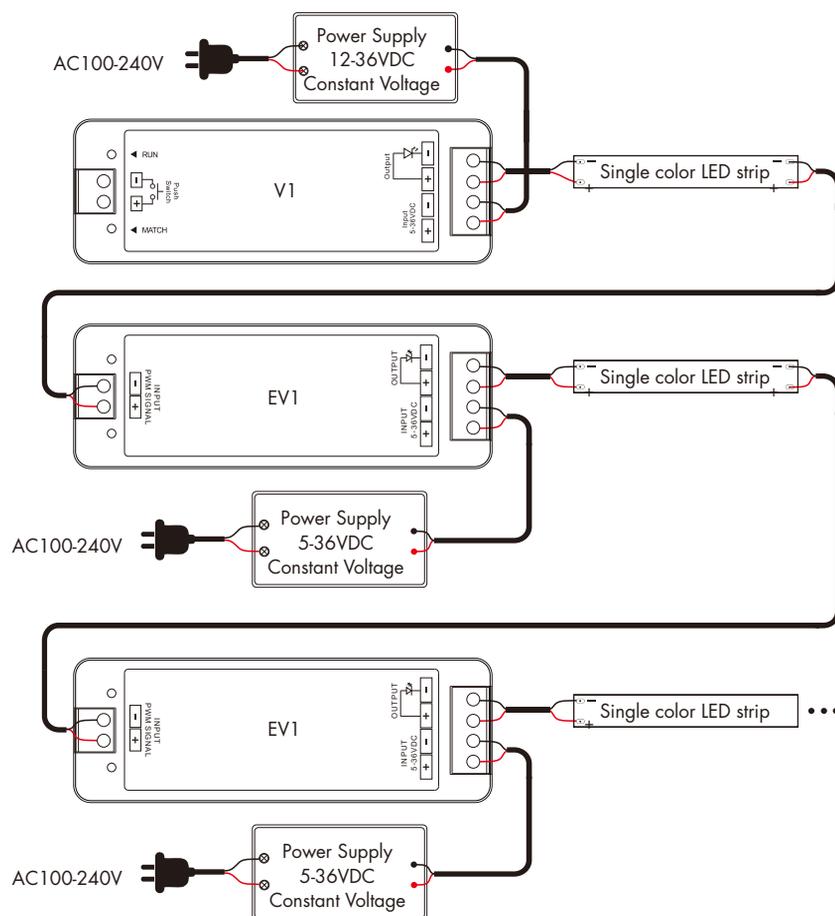

Malfunctions analysis & troubleshooting

Malfunctions	Causes	Troubleshooting
No light	<ol style="list-style-type: none"> 1. No power. 2. Wrong connection or insecure. 	<ol style="list-style-type: none"> 1. Check the power. 2. Check the connection.
Uneven intensity between front and rear, with voltage drop	<ol style="list-style-type: none"> 1. Output cable is too long. 2. Wire diameter is too small. 3. Overload beyond power supply capability. 4. Overload beyond controller capability. 	<ol style="list-style-type: none"> 1. Reduce cable or loop supply. 2. Change wider wire. 3. Replace higher power supply. 4. Add power repeater.

Safety & Warnings

1. The product shall be installed and serviced by a qualified person.
2. This product is non-waterproof. Please avoid the sun and rain.
3. Good heat dissipation will prolong the working life of the controller, please ensure good ventilation.
4. Please check if the output voltage of any power supplies used comply with the working voltage of the product.
5. Ensure all wire connections and polarities are correct and secure before applying power to avoid any damages to the LED lights.
6. If a fault occurs please return the product to your supplier. Do not attempt to fix this product by yourself.