

## PIR Motion Sensing Head


## Features

- Concealed PIR motion sensing head.
- Sensor head detection distance: 3-4 meters, detection angle: 120°.
- Powered by low voltage 5VDC, output 5V level signal.
- Bilateral snap design for easy installation.
- Use with staircase light controller (ES24, ES32),  
dual-channel inductive dimming  
and color temperature LED controller (ES-V) and so on.
- Used for lighting stairs, garages, cabinets, closets, wine cabinets and more.




CE RoHS

## Sensor Wire Define

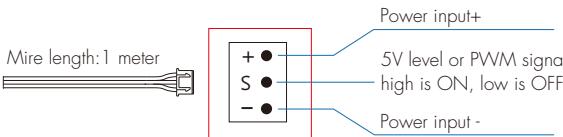


**Note:**  
When sensing human movement,  
the high level signal only lasts for 3 seconds.  
Different delay off time needs to be set  
through the controller.

## Sensing Head Installation

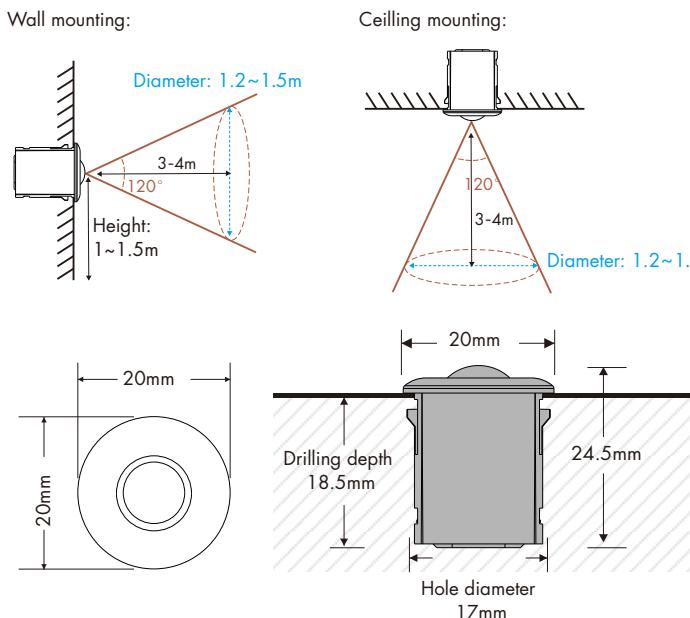

## Sensing Head Appliance

(1) For ES32 stair light controller, use the display screen to set the light off delay time:

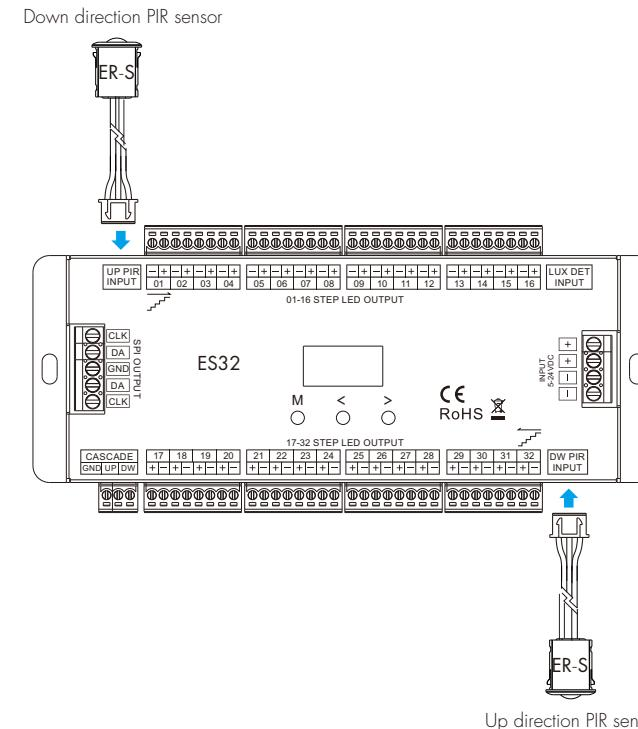

(2) For ES-V dual sensor dimming and color temperature LED Controller, use DIP switch to set the light off delay time:

